


- 1 Rod latch systems
- 2 Quarter-turns
- 3 Hinges
- 4 Sealing profiles
- 5 Miscellaneous
- 6 Stainless




Opening angle

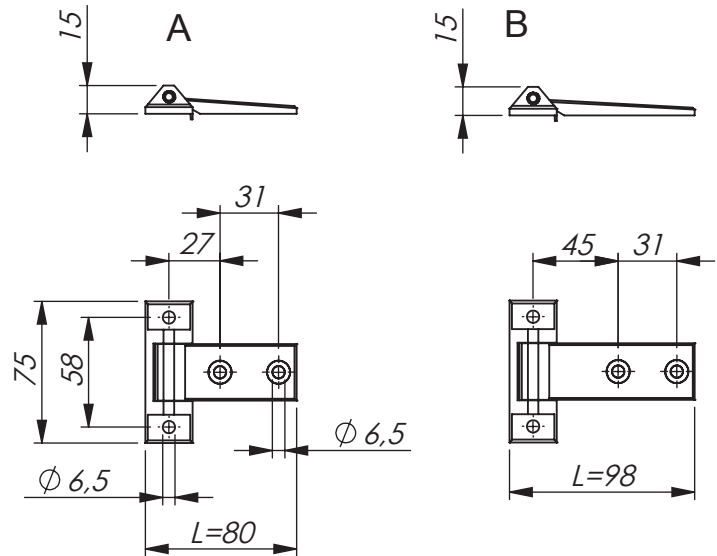

Universal LH / RH



Adjustable

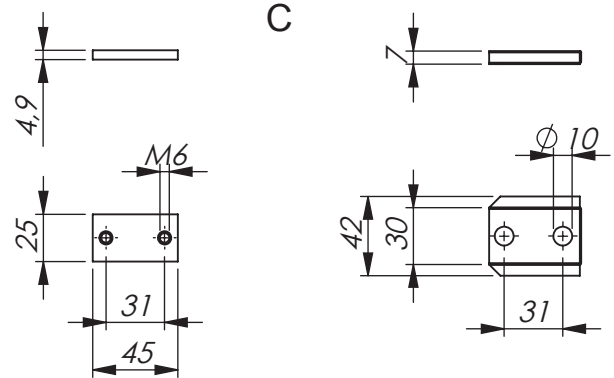

ADJUSTABLE HINGE FOR INSULATED DOORS - 180° OPENING ANGLE

Adjustable in the X- and Y-axis if used with adjustment parts and oversized mounting holes in the door. The hinge is mounted to a threaded plate previously attached to the inside of the door with a mounting bracket, temporarily taped to the door skin. The hinge can also be used without the adjustment parts, by using self-tapping screws. Universal right or left mounting. Opening angle: 180°.

Adjustment parts = Threaded plate with bracket (drawing C).

MATERIAL:

Hinge: Zinc die-cast, zinc plated, black texture powder coated or chrome plated.

Threaded plate: Zinc die-cast, zinc plated.

Bracket: Steel, zinc plated.

Pin: Steel, zinc plated.

ADJUSTABLE HINGE FOR INSULATED DOORS - 180° OPENING ANGLE

| P/N zinc | P/N black | P/N chrome | L | Adjustment parts (C) | Drawing |
|----------|-----------|------------|----|----------------------|---------|
| 321129 | 321629 | 321329 | 80 | Included | A+C |
| 32112901 | 32162901 | 32132901 | 80 | Not included | A |
| 321130 | 321633 | 321930 | 98 | Included | B+C |
| 32113001 | 32163301 | 32193001 | 98 | Not included | B |